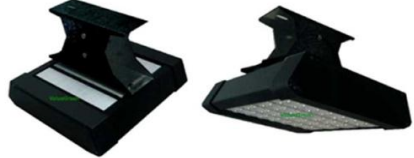




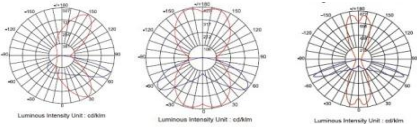


## LED Tunnel Luminaire, 90W, 120-277V, UL Listed

<b>SKU #</b>	<b>VGTL1-090</b>	
<b>Product Name</b>	Tunnel, Gas Station, Canopy Surface Mount Luminaire with Adjustable Angle Bracket	
<b>Description</b>	LED Tunnel Light, 90W, 120-277VAC	
<b>Watts (W)</b>	91.59	
<b>Output Current at 120VAC</b>	700mA	
<b>Light Output (Lumens)</b>	8262	
<b>Efficacy (Lumens/Watt)</b>	90	
<b>Color Accuracy (CRI)</b>	74	
<b>Color Temperature (K)</b>	3000K-6000K +/- 300K	
<b>Lighting Angle/ Lens Type</b>	Type I, II	
<b>Power Factor</b>	>0.9	
<b>Working Voltage</b>	100-277VAC	
<b>LED Count / Type</b>	42 / CREE XP-G LEDs	
<b>Lens Reflector Style</b>	Clear/ Anti-Glare Leses Available	
<b>Operating Temperature (°F)</b>	-40F to 131F (-40C to 55C)	
<b>Mount/Base Type</b>	Surface Mounted (4)	
<b>Dimensions in inches (mm)</b>	12"*13"*10" (302mm*330mm*256mm)	
<b>Weight in pounds (kg)</b>	17.2 lbs- 7.8 kg	
<b>Body Color Choice</b>	Silver Grey, Black, Brown, White	
<b>Typical Life Expectancy -L70 Hours</b>	>50000	
<b>Approvals / Certifications</b>	UL, FCC, RoHS, LM80	
<b>Photometric Data Available?</b>	IES File	
<b>Humidity Protection</b>	10% to 95% IP65	
<b>Total Harminic Distortion</b>	THD<20%	
<b>Warranty</b>	5 years	

### Features:

<b>Power Saving:</b>	At least 60% Energy Saving,
<b>Long life:</b>	LEDs last longer than 50,000 hrs (at 12 hrs/day about 10 years)
<b>Heat Dissipation:</b>	Patented heat dissipation design achieves optimum efficiency
<b>Modular Design:</b>	Modules can be replaced for another kind of application
<b>Installation:</b>	Single bracket design which can be used for manifold installation requirement
<b>Lab Tested:</b>	Lab tests according to IES Standards
<b>Solid-State:</b>	High-Shock and High-Vibration Resistant
<b>Instant-On:</b>	Light turns on right away, without delay on Re-Stricke
<b>High CRI:</b>	High CRI enhances all original colors
<b>Application:</b>	Tunnels, Gas Stations, Canopy Lighting.

Lamp Series	Power Consumption (W)	Color Temp	Fixture Body Color	Light Distribution Type		
VGTL1	090					
		30	3000K	SG	Silver Grey	Type I
		40	4000K	BK	Black	Type II
		50	5000K	BN	Dark Brown	
		60	5000K	WT	White	

### Comments:

**Note:** All specifications are subject to change without notice. Contact your distributor or e-mail: [info@valuegreen.com](mailto:info@valuegreen.com) for the latest specifications.

ValueGreen, Inc. 21354 Nordhoff St. Suite 108, Chatsworth, CA 91311, USA [www.valuegreen.com](http://www.valuegreen.com)

888-874-5664, 818-998-7008, Fax: 818-998-7042, [info@valuegreen.com](mailto:info@valuegreen.com)