



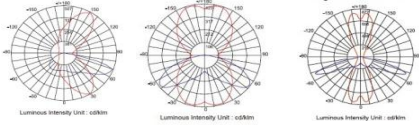


LED Tunnel Luminaire, 120W, 120-277V, UL Listed

SKU #	VGTL1-120	
Product Name	Tunnel, Gas Station, Canopy Surface Mount Luminaire with Adjustable Angle Bracket	
Description	LED Tunnel Light, 120W, 120-277VAC	
Watts (W)	122.6	
Output Current at 120VAC	700mA	
Light Output (Lumens)	11324	
Efficacy (Lumens/Watt)	92	
Color Accuracy (CRI)	73	
Color Temperature (K)	3000K-6000K +/- 300K	
Lighting Angle/ Lens Type	Type I, II	
Power Factor	>0.9	
Working Voltage	100-277VAC	
LED Count / Type	56 / CREE XP-G LEDs	
Lens Reflector Style	Clear/ Anti-Glare Leses Available	
Operating Temperature (°F)	-40F to 131F (-40C to 55C)	
Mount/Base Type	Surface Mounted (4)	
Dimensions in inches (mm)	14.2"*13"*10" (364mm*330mm*256mm)	
Weight in pounds (kg)	19.4 lbs- 8.8 kg	
Body Color Choice	Silver Grey, Black, Brown, White	
Typical Life Expectancy -L70 Hours	>50000	
Approvals / Certifications	UL, FCC, RoHS, LM80	
Photometric Data Available?	IES File	
Humidity Protection	10% to 95% IP65	
Total Harminic Distortion	THD<20%	
Warranty	5 years	

Features:

Power Saving:	At least 60% Energy Saving,
Long life:	LEDs last longer than 50,000 hrs (at 12 hrs/day about 10 years)
Heat Dissipation:	Patented heat dissipation design achieves optimum efficiency
Modular Design:	Modules can be replaced for another kind of application
Installation:	Single bracket design which can be used for manifold installation requirement
Lab Tested:	Lab tests according to IES Standards
Solid-State:	High-Shock and High-Vibration Resistant
Instant-On:	Light turns on right away, without delay on Re-Stricke
High CRI:	High CRI enhances all original colors
Application:	Tunnels, Gas Stations, Canopy Lighting.

Lamp Series	Power Consumption (W)	Color Temp	Fixture Body Color	Light Distribution Type		
VGTL1	120					
		30	3000K	SG	Silver Grey	Type I
		40	4000K	BK	Black	Type II
		50	5000K	BN	Dark Brown	
		60	5000K	WT	White	

Comments:

Note: All specifications are subject to change without notice. Contact your distributor or e-mail: info@valuegreen.com for the latest specifications.

ValueGreen, Inc. 21354 Nordhoff St. Suite 108, Chatsworth, CA 91311, USA www.valuegreen.com

888-874-5664, 818-998-7008, Fax: 818-998-7042, info@valuegreen.com